


Sulfur Dioxide Monitor

APSA-380

SO₂

For Your Needs in Air Quality Monitoring

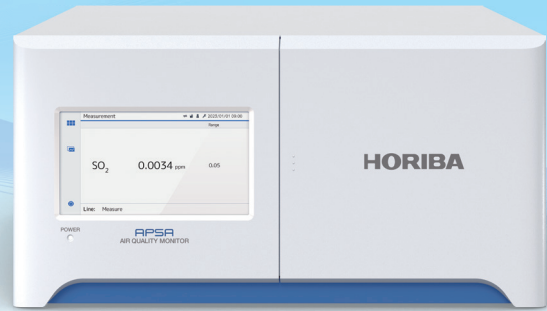



Ultimate Performance

- Ultraviolet fluorescence technology provides excellent sensitivity, stability and robustness
- Real-time continuous measurement
- Wide measurement range with up to 8 ranges selectable, minimum 0-0.05 ppm and maximum 0-20 ppm
- UV fluorescence detector and integrated HC cutter eliminate interference from moisture and coexisting components
- Incorporated UV lamp intensity compensator
- Enhanced Lower Detection Limit and response time

User-Friendly Interface & Functionality

- Durable 7-inch wide color touch screen LCD with intuitive interface and trend graph
- Selectable metrics (ppb, µg/m³, ppm, mg/m³), response time (moving average value), and calculation method
- Programmable dilution ratio
- Dust filter accessible from the front panel for easy daily maintenance

Trend Graph Screen

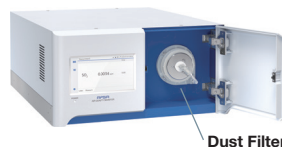

Dust Filter

Connected & Intelligent


- Remote operation from various devices: PC, tablet or smartphone
- Modbus® TCP and RTU communication
- USB flash drive for data storage

* Standard specification is wired LAN connection. For wireless connection, separate device is required.



Module Design for Various Needs & Customizations

- Each standalone module, powered by DC 24 V, is capable of providing measurement results
- Customizable for stationary, wall mount, mobile or portable installations
- Easy integration of multiple AP-380 measurement modules into air quality monitoring station or dilution continuous emission monitoring system (CEMS)



Reduced Operational Expense & Maximum Uptime


- Remote diagnostics allow fast and effective maintenance
- Internal parts timer with alarm facilitates timely parts replacement, optimizing parts stock
- Module design enables easy and fast replacement at field
- High-quality, long lifetime parts for maximum uptime

Environment-Friendly Design

- Remote operation reduces emission from transportation, contributing to the reduction of carbon footprint
- Approx. 20%* reduction in power consumption
- Long life parts reduce environmental load

* In-house comparison with previous model.

Measurement Principle

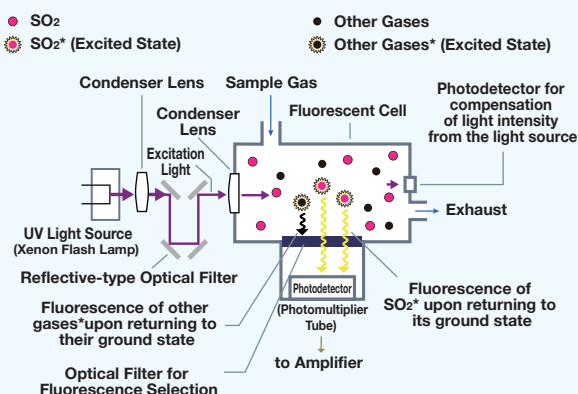

Ultraviolet Fluorescence (UVF)


The Ultraviolet Fluorescence (UVF) method utilizes the phenomenon of fluorescence, where substances absorb ultraviolet radiation and re-emit it as light. In the UVF-based sulfur dioxide (SO₂) analyzer, the sample gas is introduced into a fluorescence cell. The SO₂ in the sample gas absorbs UV radiation, gets excited, and emits fluorescence when returning to its ground state. The emitted fluorescence is selectively transmitted through an optical filter and detected by a photodetector to measure the concentration of SO₂ gas. In actual SO₂ gas analyzer, several factors such as decreased light intensity of the ultraviolet light source and interference from gases other than the measured component (SO₂) (especially aromatic hydrocarbons) affect the accuracy of the measurement. To compensate for the decreased intensity of the ultraviolet light source, the change in intensity of light source is measured using a compensation photodetector, which automatically corrects the SO₂ concentration. To reduce the fluorescence caused by interfering gases in the sample gas, aromatic hydrocarbons are removed by a unit called an HC cutter. The APSA-380 gas analyzer incorporates these measures to achieve high measurement accuracy and long-term stability.

APSA-380 Specifications


Component	Sulfur dioxide (SO ₂)
Measuring principle	Ultraviolet Fluorescence
Measurement range	0-0.05/0.1/0.2/0.5/1.0/5.0/10/20 ppm (up to 8 ranges selectable, auto-range)* ¹
Lower Detection Limit (2σ)	< 0.3 ppb* ^{2,3}
Measurement unit	ppb, ug/m ³ , ppm, mg/m ³
Sample gas flow rate	Approx. 0.6 L/min
Repeatability	±1.0% of full scale
Linearity	±1.0% of full scale
Zero drift	< 0.5 ppb (24 h)
Span drift	< 0.5% of full scale (24 h)
Response time (T ₉₅)	< 120 s from the inlet* ³
Display	7-inch color LCD with touch panel
Communication	Ethernet × 2 (Modbus® TCP), RS-232C × 1 (Modbus® RTU), USB flash drive × 1
Analog output (option)	Maximum : 3 channels (insulated) DC4-20 mA, DC 0-0.1 V, DC 0-1 V, DC 0-5 V or DC 0-10 V
Digital output (option)	Relay contact output for range 3 channels, relay contact output for other 6 channels
Digital input (option)	Maximum : 4 channels, non-isolated input
Installation environment	Operation temperature : 0-40°C (32-104°F), relative humidity : 85% or less
Temperature and pressure compensation	With
Sampling pump and filter	Internal
Power supply	AC 100-240V ±10% (max. voltage: AC 250 V), 50/60 Hz, consumption 50 W
Dimensions, weight	430 (W) x 568 (D) x 221 (H) mm, Approx. 18 kg
Compliance	CE, UKCA, KC, FCC, China RoHS

*¹ : 2nd point calibration is required in case of using higher than 1 ppm range *² : For ranges less than 1 ppm *³ : Digital filter
 • If there is other measurement range requirement than shown above, please consult HORIBA
 • Modbus is a trademark of Schneider Electric USA Inc.


Dimensional Outline (Unit: mm)

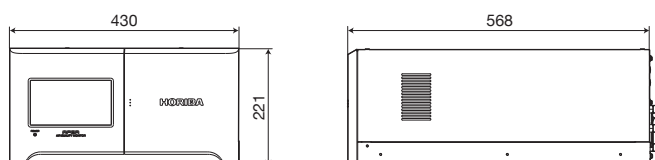

Rear Panel Configuration

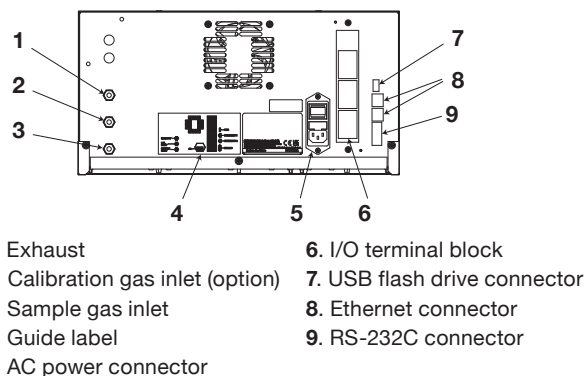

Flow Sheet

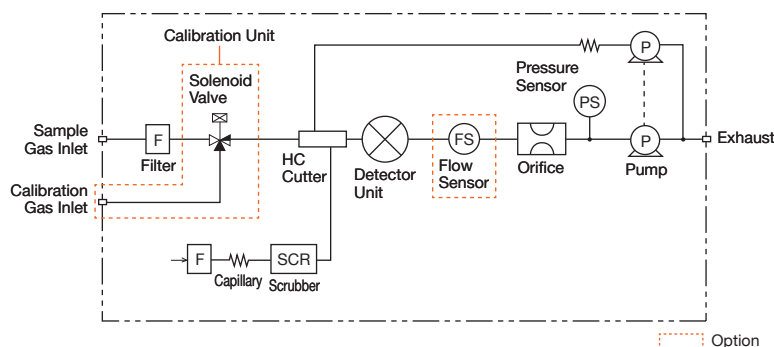

Options

- I/O terminal block (Analog input/output, digital input/output)
- Pressurized calibration unit
- Flow sensor
- USB flash drive
- Mounting parts (rubber feet, brackets and slide rails, brackets for slide rails)

Under Certification: TÜV, US EPA, MCERT, CAEPI, KTL, JMOE



The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System ISO45001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

HORIBA

HORIBA, Ltd.
 Group Head Office
 2 Miyano Higashi-cho, Kisshoin, Minami-ku, Kyoto, 601-8510, Japan
 Phone: 81 (75) 313-8121 Fax: 81 (75) 321-5725
<https://www.horiba.com>



Worldwide locations of HORIBA